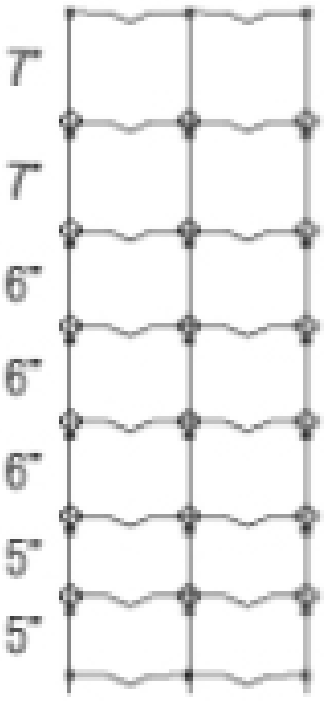

842-6-330'

- ★ 8 horizontal line wires
- ★ 42" tall
- ★ 6" between vertical wires
- ★ 12.5 gauge high-tensile wire
- ★ 330' roll